



VR 交叉滾子導軌

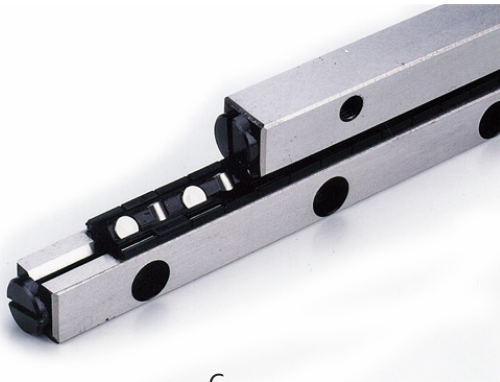

- 高品質製程處理、精度高、耐荷重、壽命長、滑行順暢。
- 採用德、日精密滾柱保持組、摩擦阻力順、穩定性特佳。
- 適用於各種、高精度、高速度、低成本之直線運動機構。

產品編號	VR3, 4, 6, 9 系列
滑台材質	SUJ ₂ 軸承鋼
硬度	HRC58°
精度	±0.005mm

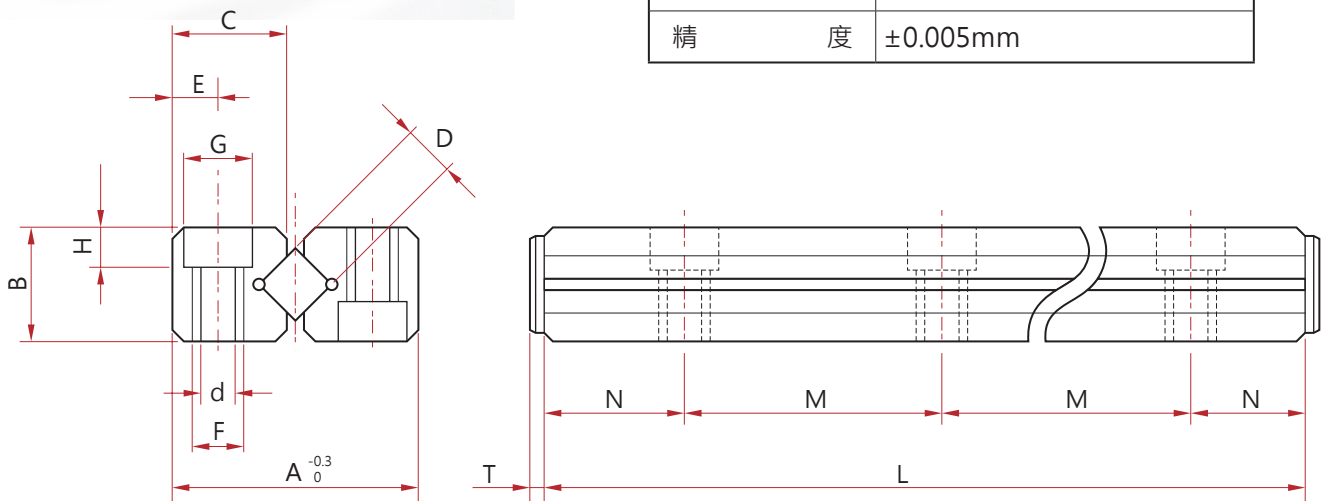

型號	D	L	A	B	C	M x P	N	E	F	d	G	H	T	行程
VR3050	3	50	18	8	8.2	1 x 25	12.5	3.5	M4	3.3	6	3.1	2	28
VR3075		75				2 x 25								48
VR3100		100				3 x 25								58
VR3125		125				4 x 25								78
VR3150		150				5 x 25								88
VR4080	4	80	22	11	10	1 x 40	20	4.5	M5	4.3	8	4.2	3	58
VR4120		120				2 x 40								82
VR4160		160				3 x 40								105
VR4200		200				5 x 40								130
VR6100	6	100	31	15	14	1 x 50	25	6	M6	6	9.5	5.2	4	55
VR6150		150				2 x 50								85
VR6200		200				3 x 50								120
VR6250		250				4 x 50								150
VR6300		300				5 x 50								185
VR6350	350	6 x 50	215											
VR9200	9	200	44	21	20.2	1 x 100	50	9	M8	9	10.5	6.2	5	115
VR9300		300				2 x 100								175
VR9400		400				3 x 100								235
VR9500		500				4 x 100								295